


Technical drawing of a cable joint (継手) showing a cross-section and a top view. The cross-section shows a cable (鋼管) with a central core and surrounding strands. A central rod (1) passes through the cable, secured by a nut (2) and a washer (3). A sleeve (4) is also shown. The top view shows the cable's profile with a central hole (5) and a surrounding ring (6). A label '継手端部' points to the joint end.


※印は当社のオリジナル製品です。

①

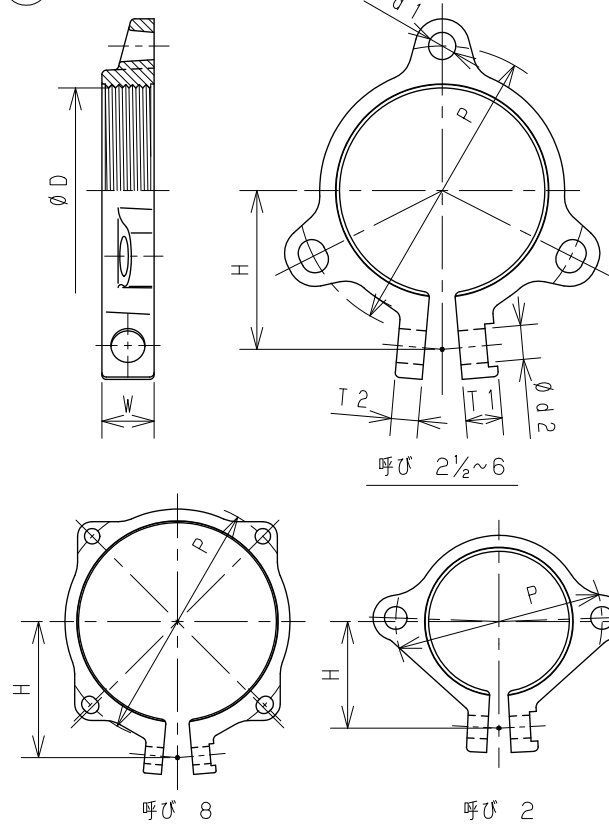


注記：表面処理はエポキシ樹脂系粉体塗装（グレー色）

②



注記：表面処理はエポキシ樹脂系粉体塗装
(グレー色)

③



呼 口		D 1	D 2	L	t
A (mm)	B (in)				
5 0	2	60.5	70	34.0	3.0
6 5	2 1/2	76.3	86	39.0	3.0
8 0	3	89.1	102	43.0	3.5
1 0 0	4	114.3	128	49.0	3.5
1 2 5	5	139.8	154	57.5	4.0
1 5 0	6	165.2	182	60.5	4.5
2 0 0	8	215.0	238	75.5	6.5

4 締付ボルト・ナット

6 固定ボルト・ナット

呼 び		締付ボルト・ナット				固定ボルト・ナット			
A (mm)	B (in)	d (M)	L	S	B	d (M)	L	S	B
50	2	8	55	25	13	8	40	25	13
65	2 1/2	8	60	25	13	10	45	18	17
80	3	10	70	28	17	12	50	30	19
100	4	10	80	28	17	12	55	33	19
125	5	12	95	30	19	14	65	35	22
150	6	12	95	30	19	14	65	35	22
200	8	14	130	45	22	16	90	40	24

名称	排水鋼管用可とう継手 TMグリップ (TM-G)				
図番	G71	尺度	承認 真田	確認 西	作成 野村
作成	2020.04.01	Free			

○ 東亜高級継手バルブ製造株式会社